


Company details	
Company address:	Sasol Energy
	Sasol Place
	50 Katherine Street, Sandton, 2090, South Africa
Postal address:	PO Box 5486, Johannesburg, 2000
Contact detail:	Email- Techserve@sasol.com , Contact Centre Tel.- 0860 335 4444
Web page:	www.Sasol.com

Product Description

Sasol Engine Oil Synthetic N 5W-30 is a fully synthetic lubricant formulated with modern performance additives to help provide long engine life and protects critical parts related to lubricant failures for up to 8 000 kms or OEM recommended oil change interval.

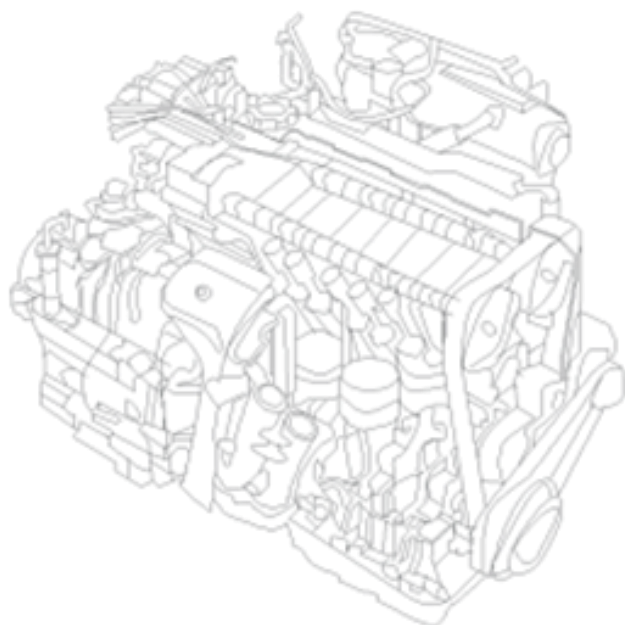

Typical Application

Sasol Engine Oil Synthetic N 5W-30 is intended for all modern vehicles with petrol engines found in passenger cars, SUVs, light vans and light trucks.

Product Characteristics

Sasol Engine Oil Synthetic N 5W-30 has the following features and benefits:

- Helps engine life,
- Helps prevent oil breakdown
- Outstanding wear protection under a wide variety of operating conditions
- OEM warranty protection
- Protects up to 15 000 kms of the recommended oil change interval.

Physical Properties

Property	Method	Units	Value / Typical Values
Kinematic Viscosity @ 100°C	ASTM D445	mm ² /s	10.3
Kinematic Viscosity @ 40°C	ASTM D445	mm ² /s	63.2
Apparent Viscosity @ -30°C	ASTM D5293	mPa.s	6200
Viscosity Index	ASTM D2270		150
Pour Point	ASTM D97	°C	-39
Flash Point (COC)	ASTM D92	°C	220
Density @ 15°C	ASTM D4052	kg/m ³	858
Total Base Number	ASTM D2896	mgKOH/g	6.1
Sulphated Ash	ASTM D874	%m/m	0.6
Evaporative Loss (Noack)	ASTM D5800-08	%m/m	11

Product Specifications

	Specification	Approved	Meets Specification
SAE	5W-30		√
ILSAC	GF- 6A		√
API	SP, SN, SN Plus, SM		√
Ford	WSS-M2C961-A1		√
GM	6094M		√
Chrysler	MS-6395		√

Use Guidelines

Sasol Engine Oil Synthetic N 5W-30 is not recommended for use in VW R5 and V10 direct injected engines fitted with or without DPF's, these vehicles should use relevant VW recommended products.

Product Supply and Packaging

Packaging types:

1L and 5L plastic bottle with child proof caps.

20L and 210L stainless steel drums.

Storage

Avoid temperatures above 80°C and strong oxidizing agents.

Use within 5 years of manufacturing date

Keep away from ignition sources.

Safety

For all safety-related matters, refer to the SDS.

Recycling / Disposal

Recycling / disposal of both product and container should be done in accordance with the applicable local laws. Refer to SDS.

Related Documents

Refer to the Engine Oil Synthetic N 5W-30 Safety Data Sheet.

Disclaimer

This PDS provides information regarding the properties, characteristics, health, safety and environmental hazards of the product at the date of issue, to facilitate the safe receipt, use and handling of this product in the workplace and does not replace any product information or product specifications. Since Sasol and its subsidiaries cannot anticipate or control all conditions under which this product may be handled, used and received in the workplace, it remains the obligation of each user, receiver or handler to, prior to usage, review this SDS in the context within which this product will be received, handled or used in the workplace. The user, handler or receiver must ensure that the necessary mitigating measures are in place with respect to health and safety. This does not substitute the need or requirement for any relevant risk assessments to be conducted. It further remains the responsibility of the receiver, handler or user to communicate such information to all relevant parties that may be involved in the receipt, use or handling of this product. Although all reasonable efforts were exercised in the compilation of this PDS, Sasol does not expressly warrant the accuracy of, or assume any liability for incomplete information contained herein or any advice given. When this product is sold, risk passes to the purchaser in accordance with the specific terms and conditions of sale.

Revision date: December 2020